

UFC SERIES Low ProFile™ 400Hz AND 270VDC GROUND POWER UNITS



HORIZONTAL CONFIGURATION
(Shown with standard 4 inch stand and touch screen panel)

STANDARD FEATURES:

- IP55
- Certified to UL 1012
- Indoor/Outdoor (Hangar/Ramp) Use
- ≤ 5% Input Current Distortion at max load
- Automatic Input Line Monitoring
- Advanced Integrated Display (AID™) Console
- 8000 Event Log / Diagnostics
- TCP/IP/Ethernet interface (Modbus)
- Internal Communication Ports - USB, RJ45 (ETHERNET), RS485 (Modbus), & RS232
- External Communication Port – USB
- 15% Automatic Line Drop Compensation
- Emergency Power “OFF” Switch
- I/O Voltage and Current Monitoring
- Input Frequency Monitoring
- Elapsed Time Meter
- Front Panel Voltage Adjust
- Front Panel Summary Fault Indicators
- Input High Voltage Transient Protection
- Multi Language Display - Arabic, Asian, English, French, German, Italian, Portuguese, Russian and Spanish, Others - Specify

MECHANICAL SPECIFICATIONS:

Size: See Figure 1
 Weight: See Figure 1
 Enclosure: NEMA 250 - Type 3SX
 Cooling: Forced Convection

This product was manufactured in a plant whose quality management system is registered to ISO 9001:2015.



APPLICATION:

Since its beginning in 1960, Unitron has specialized in the design and development of reliable, solid-state power systems. Through an innovative design, Built-In Test Equipment (BITE) and modular construction, Unitron products assure maximum power availability and minimal repair time for the latest military aircraft including the F-22A Raptor and the JSF F-35A, Lightning-II.

The UFC Series includes lightweight 400Hz or 270VDC and 28VDC mobile GPUs for aircraft ground power applications in the hangar or ramp area. The **dual output AC/DC Low ProFile** provides AC or DC power from a single GPU. Kilowatt power for the complete unit is limited to the nominal rating of the 400Hz output of the unit. Because a single unit can do the work of two, Unitron's AC/DC GPU reduces operating and maintenance costs, and decreases ramp congestion.

In addition to fixed GPUs, Unitron offers 400Hz, 28VDC, 270VDC and combination AC/DC units in towable, mobile and bridge-mounted configurations.

OPTIONS:

- Alternate Input Voltages Available (Specify)
- Various Convenience Outlets (Specify Voltage and Frequency)
- AC Output Power Cables with Plugs (Available in 30 or 60 ft. lengths)
- External Communication Port - Ethernet
- 270VDC Output Power Cables with Plug (Available in 35, 63, or 83 ft. lengths)
- 50 or 100 foot Input Power Cable (Pigtail)
- Bench Top Voltage Adjust
- Side Cable Hanger(s) or Top Cable Storage Rack
- 18-Inch Hazard Area Clearance
- Output Universal Aircraft Safety Interlock Circuit Disconnect (Single or Dual)
- Various Convenience Outlets (Specify Voltage and Frequency)
- Output Safety Disconnect
- Second 28VDC output
- Alternate Mounting Configurations Available
- Touch Screen Panel (Indoor)
- 300% overload for 6 seconds or 425% overload for 1 second* (Specify)
- CSA Certified
- CE Mark Certified
- Lockable Front Door
- Custom Paint & Decals (Standard Color - White)
- Ground Fault Monitor
- Stand - 4, 12 or 18 Inch
- Forklift Tubes - 4 Inch
- Leg Kit - 12 or 18 Inch
- Neutral Interrupt Protection
- Universal Safety Interlock

*IAW MIL-STD-704F and ISO 6858: 2017

SPECIFICATIONS / STANDARDS (Meets or Exceeds):

NFPA 70 (NEC 500)	MIL-STD-1472
EN 60079-10	MIL-STD-704F
DFS-400	EN 61000-6-2 and -4**
ISO 461-1/2	2006/95/EC**
ISO 1540	UFGS 26 35 44
ISO 6858	Lockheed Martin F-35 Ground
SAE ARP 5015	Electrical Power Interface Specification
UFGS 26 35 43	(Document No. 2ZEU00004, Rev-0007)

**Defined Basis of CE Mark Certification

GENERAL SPECIFICATIONS

AC INPUT:

Voltage	208-240V and 380-480V, $\pm 10\%$, -15%, 3 \emptyset , 3 or 4 wire plus ground (Alternate Voltages Available)
Frequency	60 Hz $\pm 10\%$
Phase Rotation	Any
Protection	Over/undervoltage, loss of phase, overcurrent, short circuit
Inrush Current	No greater input current than at 100% of full load rating

AC OUTPUT:

Power Rating	45, 60, 75 or 90 kVA (Specify)
Power Factor Range	0.5 lagging to 0.8 leading
Overload:	
100% continuous;	110% for 60 min;
125% for 10 min;	150% for 2 min;
200% for 20 sec	
Voltage*	115/200 volts, 3 \emptyset , 4 wire, grounded neutral
Voltage Adjust*	$\pm 15\%$
Voltage Regulation	$\pm 1.0\%$ under all conditions of line, balanced loads and temperature
Voltage Transients	IAW MIL-STD-704F
Frequency Regulation	400 Hz $\pm 0.01\%$ under all conditions of line, load and temperature
Frequency Transients	None
Phase Angle Regulation	$\pm 2^\circ$ for balanced loads
Harmonic Distortion	2.0% maximum
Protection	Overload, short circuit, over/under voltage and safety disconnect
Automatic Line Drop Compensation (ALDC)	15%

ENERGY FACTORS:

Efficiency	94% typical at full load, 92% typical at half load; varies depending on configuration and rating
Energy Efficiency Ratio	20.0 typical

NOTE:
*Also available 120/208 VAC, adjustable $\pm 10\%$

28VDC OUTPUT:

Overload:	
100% continuous	150% for 5 sec
200% for 1 sec	250% for 50 msec
Current Rating	15 Amps continuous
Voltage	28 VDC, 2 wire, grounded
Voltage Adjust	28 VDC $\pm 10\%$
Voltage Regulation	$\pm 0.5\%$
Output Ripple Voltage	150 mV pk to pk
Protection	Overload, short circuit, overvoltage

270VDC OUTPUT:

Power Rating	36, 48, 60, or 72 kW dependant upon AC rating
Overload/Transient:	
(IAW LMCO Document No. 2ZEU00004, Rev-0007)	
100% continuous;	150% for 5 sec;
200% for 1 sec;	250% for 50 msec
Pulse Loads	IAW LMCO Document No. 2ZEU00004, Rev-0007
Voltage	270 VDC, 2 wire, grounded negative
Voltage Adjust	270 VDC $\pm 10\%$
Voltage Regulation	
100% continuous rated load and $\pm 10\%$ input voltage	$\pm 0.5\%$
No load to rated load with nominal input voltage	$\pm 0.5\%$
Voltage Adjust	270 VDC $\pm 5\%$
Output Ripple Voltage	3.0 volts pk to pk
Transient Response	IAW MIL-STD-704F, Fig.16 and LMCO Document No. 2ZEU00004, Rev-0007
Protection	Overload, short circuit, overvoltage and safety disconnect
Automatic Line Drop Compensation (ALDC)	10%

ENVIRONMENTAL:

Acoustical Noise	< 65 dBA maximum at 5 feet (1.5m)
Temperature Range	-40°C to +55°C, Non-Condensing
Relative Humidity	0 - 95%, Non-Condensing
Ingress of Water	Type 3SX, IP55

Weight:
36kW / 45.0kVA = 760lbs. (345kgs.)
48kW / 60.0kVA = 876lbs. (397kgs.)
60kW / 75.0kVA = 1,048lbs. (475kgs.)
72kW / 90.0kVA = 1,140lbs. (517kgs.)

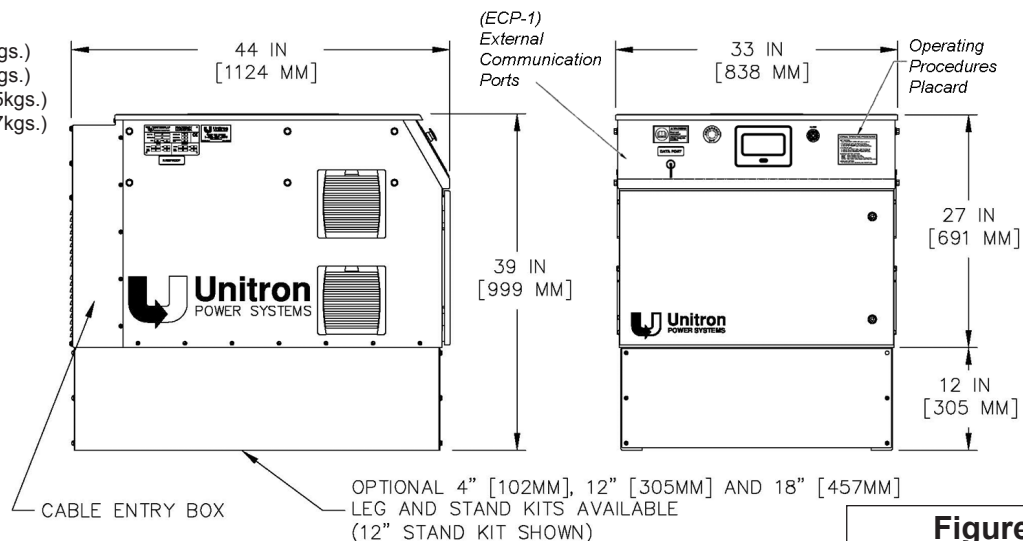


Figure 1